

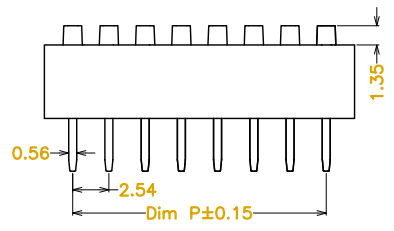

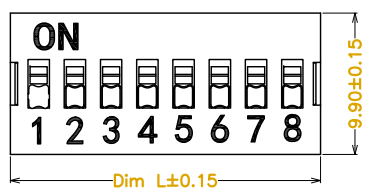


2	1
Rev	Description
0	new release
Date	2021.12.08

Poles	01P	02P	03P	04P	05P	06P	07P	08P	09P	10P	12P
Dim P	---	2.54	5.08	7.62	10.16	12.70	15.24	17.78	20.32	20.86	27.94
Dim L	3.96	6.50	9.04	11.58	14.12	16.66	19.20	21.74	24.28	26.82	31.90

Housing: PBT +30%G.F, UL94V-0
 Contact: Phosphor bronze, Gold plated

Electrical
 Rated voltage: 24V/DC
 Contact Resistance: ≤100mΩ
 Rated current: 25mA
 Insulation Resistance: ≥100MΩ/DC500V
 Withstanding voltage: 500VAC/1min
 Mechanical & operating ambient
 Operation Temp: -20°C — +85°C
 Mechanical life: 2000 operations Min
 Operation force: 400gf max.

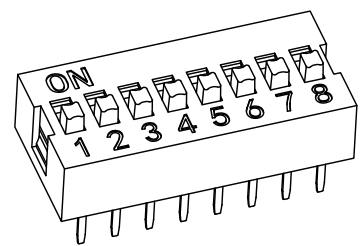

P.C.B. LAYOUT

SCHEMATIC (TYP.)



RONMEE 榮國工業股份有限公司 Ronmee Industrial Corporation		DIP Switch	
Tolerance Angle ± 5° x. ±0.50 x. x ±0.30 x. x. x ±0.10 x° ±1°	Drawn: Joey.Lin Checked: C.L.Jang Approved: R.X.Lin	P/N: ADS-08P-B(R) File No: Unit: mm. Scale: 1/1. Size: A4.	