



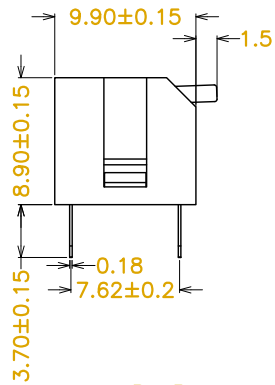
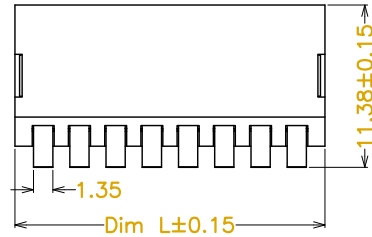


Poles	01P	02P	03P	04P	05P	06P	07P	08P	09P	10P	12P
Dim P	--	2.54	5.08	7.62	10.16	12.70	15.24	17.78	20.32	20.86	27.94
Dim L	3.96	6.50	9.04	11.58	14.12	16.66	19.20	21.74	24.28	26.82	31.90

2	1	
Rev	Description	Date
0	new release	2021.12.08



SCHEMATIC(TYP.)



(1,2,3,4,5, POS AVAIL)

Housing: PBT +30%G.F, UL94V-0
 Contact: Phosphor bronze, Gold plated

Electrical
 Rated voltage: 24V/DC
 Contact Resistance: ≤100mΩ
 Rated current: 25mA
 Insulation Resistance: ≥100MΩ/DC500V
 Withstanding voltage: 500VAC/1min
 Mechanical & operating ambient
 Operation Temp: -20°C — +85°C
 Mechanical life: 2000 operations Min
 Operation force: 400gf max.

RONMEE 榮國工業股份有限公司 Ronmee Industrial Corporation		DIP Switch			
Tolerance Angle ± 5° x. ± 0.50 x. x ± 0.30 x. x. x ± 0.10 x° ± 1°	Drawn:	Joey.Lin	P/N: ADS-08PR-B(R)		
	Checked:	C.L.Jang	File No:		
	Approved:	R.X.Lin	Unit: mm.	Scale: 1/1.	Size: A4.