

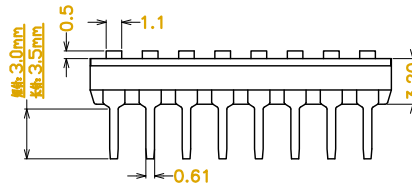
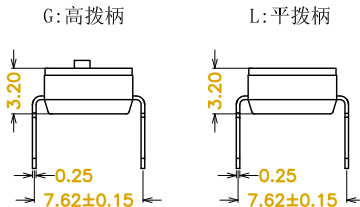




Poles	01P	02P	03P	04P	05P	06P	07P	08P	09P	10P	12P
Dim P	—	2.54	5.08	7.62	10.16	12.70	15.24	17.78	20.32	20.86	27.94
Dim L	3.96	6.50	9.04	11.58	14.12	16.66	19.20	21.74	24.28	26.82	31.90

Rev	Description	Date
0	new release	2021.12.08



P.C.B.LAYOUT

SCHEMATIC(TYP.)



Housing: PBT +30%G.F, UL94V-0
 Contact: Phosphor bronze, Gold plated

Electrical
 Rated voltage: 24V/DC
 Contact Resistance: ≤100mΩ
 Rated current: 25mA
 Insulation Resistance: ≥100MΩ/DC500V
 Withstanding voltage: 500VAC/1min
 Mechanical & operating ambient
 Operation Temp: -20°C — +85°C
 Mechanical life: 2000 operations Min
 Operation force: 400gf max.

RONMEE 榮國工業股份有限公司
Ronmee Industrial Corporation

Tolerance	Projection		
	Angle ± 5°		
x. ± 0.50	Drawn:	Joey.Lin	P/N: DRI-08P
x. x ± 0.30	Checked:	C.L.Jang	File No:
x. x. x ± 0.10	Approved:	R.X.Lin	Unit: mm. Scale: 1/1. Size: A4.
x° ± 1°			