



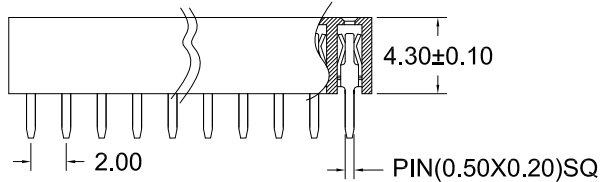


Rev	Description	Date
0	New Drawing	2022/02/17

**SPECIFICATIONS**

**Material:**  
 Insulator: Glass filled PA6T (UL94V-0),  
 Black, Contacts: Brass  
 Plating: Au or Sn over 30μ" Ni

**Electrical Characteristics:**  
 Contact Resistance: 20mΩ Max.  
 Insulator Resistance: 1000MΩ Min.  
 Withstanding Voltage: AC 500V  
 Currnt Rating: 3 AMP  
 Operating Temperature range: -40°C to +105°C  
 Resistance to Soldering Heat: 205°C ±5°C  
 Spacing: 2.0  
 Salt sprar test: 24H



PCB LAYOUT

<b>RONMEE</b>		榮國工業股份有限公司 <b>Ronmee Industrial Corporation</b>		
		2.0 Single Base Female Header 2.0 單排排母		
Tolerance	Projection			
Angle ± 5°				
x. ±0.50	Drawn: Joey.Lin	P/N:	FH2.0-XXU/1GF-4.3ST	
x.x ±0.30	Checked: C.L.Jang	File No:		
x.x.x ±0.10	Approved: R.X.Lin	Unit: mm.	Sheet: 1/1.	Size: A4.
x° ±1°				