

2	1	
Rev	Description	Date
0	New Drawing	2022/02/17








SPECIFICATIONS

Material:

Insulator: Glass filled PA6T (UL94V-0),
 Black, Contacts: Brass
 Plating: Au or Sn over 30μ" Ni

Electrical Characteristics:

Contact Resistance: 20mΩ Max.
 Insulator Resistance: 1000MΩ Min.
 Withstanding Voltage: AC 500V
 Currernt Rating: 3 AMP
 Operating Temperature range: -40°C to +105°C
 Resistance to Soldering Heat: 205°C ±5°C
 Spacing: 2.0
 Salt sprar test: 24H

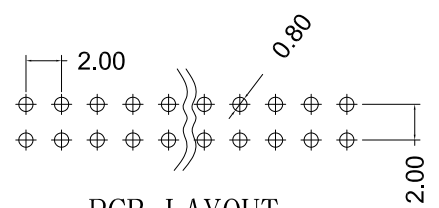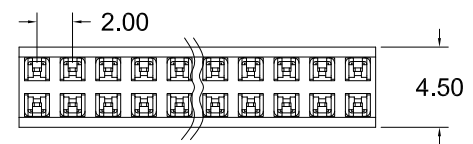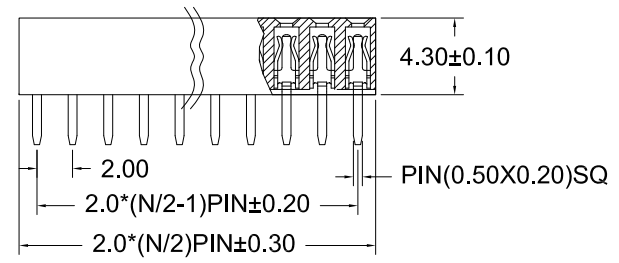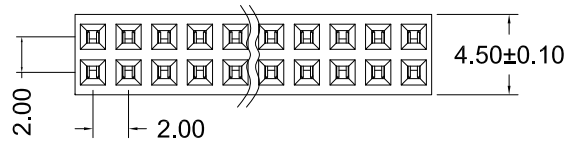

PCB LAYOUT

RONMEE		榮國工業股份有限公司 Ronmee Industrial Corporation																	
		2.0 Double Base Female Header 2.0 雙排排母																	
Tolerance	Projection	<table border="1"> <tr> <td>Drawn:</td> <td>Joey.Lin</td> <td>P/N:</td> <td colspan="2">FH2.0-XXU/2GF-4.3ST</td> </tr> <tr> <td>Checked:</td> <td>C.L.Jang</td> <td>File No:</td> <td colspan="2"></td> </tr> <tr> <td>Approved:</td> <td>R.X.Lin</td> <td>Unit: mm.</td> <td>Sheet: 1/1.</td> <td>Size: A4.</td> </tr> </table>			Drawn:	Joey.Lin	P/N:	FH2.0-XXU/2GF-4.3ST		Checked:	C.L.Jang	File No:			Approved:	R.X.Lin	Unit: mm.	Sheet: 1/1.	Size: A4.
Drawn:	Joey.Lin				P/N:	FH2.0-XXU/2GF-4.3ST													
Checked:	C.L.Jang	File No:																	
Approved:	R.X.Lin	Unit: mm.	Sheet: 1/1.	Size: A4.															
Angle ± 5°																			
x. ±0.50																			
x. x ±0.30																			
x. x. x ±0.10																			
x° ±1°																			