

4

3

2

1

Rev



Description

Date

0

New Drawing

2022/02/17

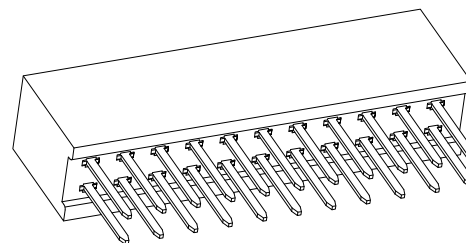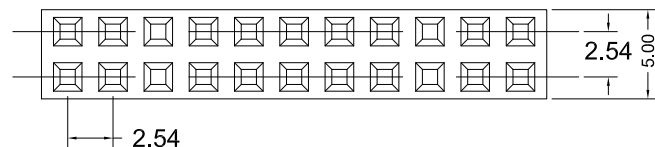





SPECIFICATIONS

Material:

Insulator: Glass filled PBT (UL94V-0),
Black, Contacts: Brass
Plating: Au or Sn over 30 μ m Ni

Electrical Characteristics:

Contact Resistance: 20m Ω Max.
Insulator Resistance: 1000M Ω Min.
Withstanding Voltage: AC 500V
Current Rating: 3 AMP
Operating Temperature range: -40 $^{\circ}$ C to +105 $^{\circ}$ C
Resistance to Soldering Heat: 205 $^{\circ}$ C \pm 5 $^{\circ}$ C
Spacing: 2.54
Salt spray test: 24H

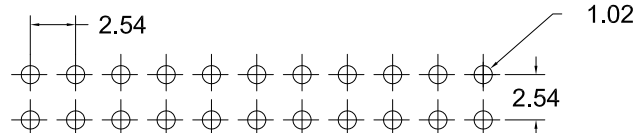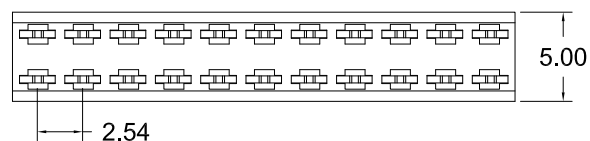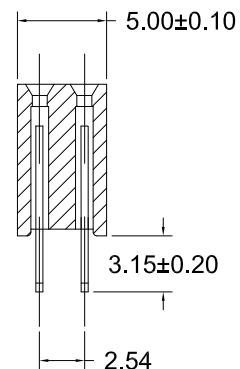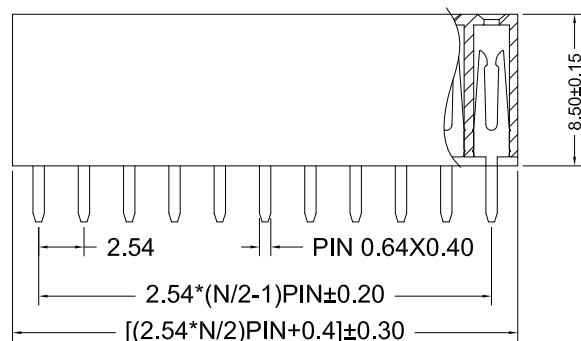

PCB LAYOUT


RONMEE

榮國工業股份有限公司
Ronmee Industrial Corporation

Tolerance

Angle $\pm 5^{\circ}$ x. ± 0.50 x. x. ± 0.30 x. x. x. ± 0.10 x $^{\circ}$ $\pm 1^{\circ}$

Projection



2.54 Double Base Female Header

2.54 雙排排母

Drawn:

Joey.Lin

P/N:

FH2.54-XXY/2GF-8.5ST

Checked:

C.L.Jang

File No:

Approved:

R.X.Lin

Unit: mm.

Sheet: 1/1.

Size: A4.

4

3

2

1