

Rev	Description	Date
0	New Drawing	2022/02/17








SPECIFICATIONS

Material:

Insulator: Glass filled PA6T (UL94V-0),
 Black Contacts: Brass
 Plating: Au or Sn over 30 μ" Ni

Electrical Characteristics:

Contact Resistance: 20mΩ Max.
 Insulator Resistance: 1000MΩ Min.
 Withstanding Voltage: AC 500V
 Current Rating: 1.0 AMP
 Operating Temperature range: -40°C to +105°C
 Resistance to Soldering Heat: 255°C ± 5°C
 Spacing: 1.27
 Salt sprar test: 24H

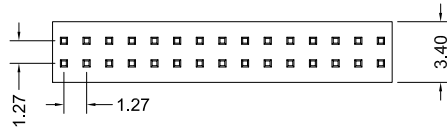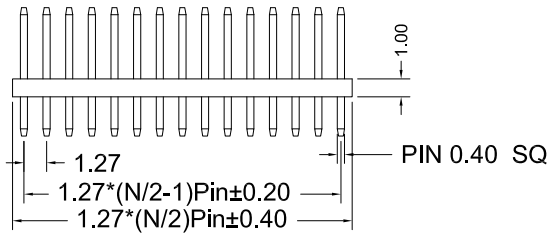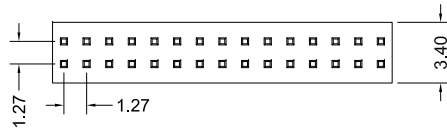

PCB LAYOUT

RONMEE

榮國工業股份有限公司
 Ronmee Industrial Corporation

Tolerance	Projection	Double Base Female Header 1.27 雙排排針		
Angle ± 5°		Drawn: Joey.Lin	P/N:	PH1.27XXP/2GF-7.2AR
x. ±0.50		Checked: C.L.Jang	File No:	
x. x ±0.30		Approved: R.X.Lin	Unit: mm.	Sheet: 1/1.
x. x. x ±0.10				Size: A4.
x° ±1°				