

4

3

2

1

Rev

Description

Date

0

New Drawing

2022/02/17

SPECIFICATIONS

Material:

Insulator: Glass filled PA6T (UL94V-0),

Black Contacts: Brass

Plating: Au or Sn over 30 μ" Ni

Electrical Characteristics:

Contact Resistance: 20mΩ Max.

Insulator Resistance: 1000MΩ Min.

Withstanding Voltage: AC 500V








Current Rating: 1.0 AMP

Operating Temperature range: -40°C to +105°C

Resistance to Soldering Heat: 255°C ± 5°C

Spacing: 2.0

Salt spray test: 24H

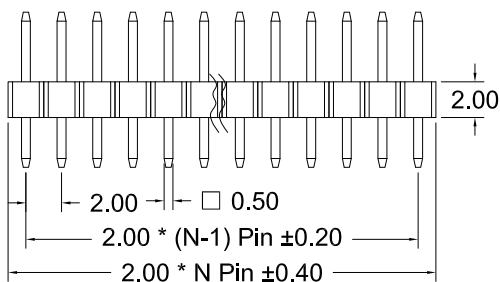

PCB LAYOUT

RONMEE

榮國工業股份有限公司
Ronmee Industrial Corporation

Tolerance

Angle ± 5°


x. ± 0.50

x. x ± 0.30

x. x. x ± 0.10

x° ± 1°

Projection



2.0 Single Base Female Header

2.0單排排針

Drawn:

Joey.Lin

P/N:

PH2.0-XXP1GF-8.7AR

Checked:

C.L.Jang

File No:

Approved:

R.X.Lin

Unit: mm.

Sheet: 1/1.

Size: A4.

4

3

2

1