

Rev	Description	Date
0	New Drawing	2022/02/17






## SPECIFICATIONS

### Material:

Insulator: Glass filled PA6T (UL94V-0),  
 Black Contacts: Brass  
 Plating: Au or Sn over 30 μ" Ni

### Electrical Characteristics:

Contact Resistance: 20mΩ Max.  
 Insulator Resistance: 1000MΩ Min.  
 Withstanding Voltage: AC 500V  
 Currernt Rating: 1.0 AMP  
 Operating Temperature range: -40°C to +105°C  
 Resistance to Soldering Heat: 255°C ± 5°C  
 Spacing: 2.54  
 Salt sprar test: 24H

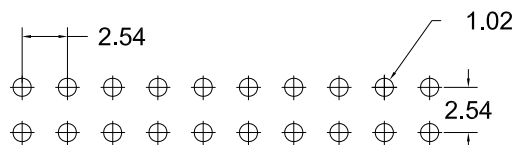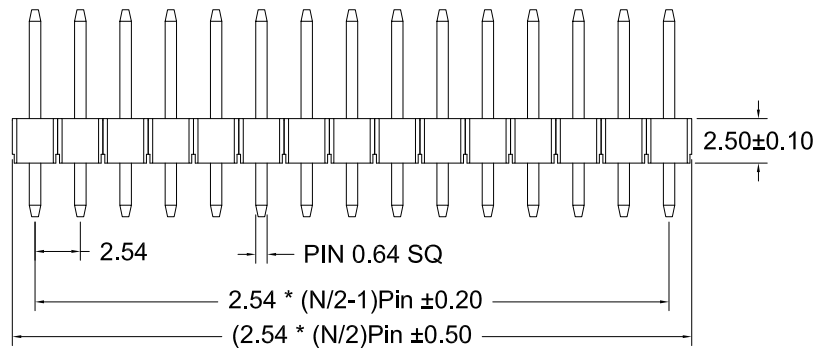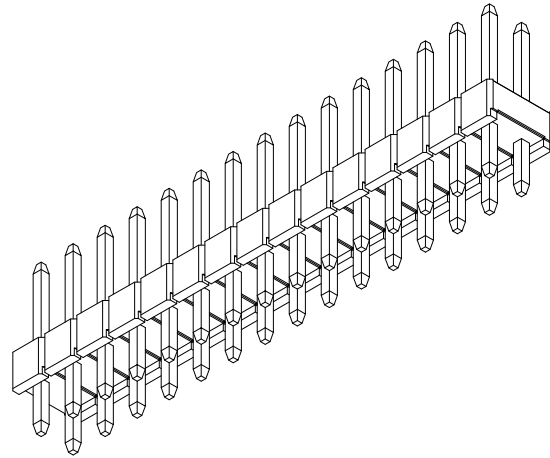

**RONMEE**

榮國工業股份有限公司  
 Ronmee Industrial Corporation

未注公差按公差分段要求

Tolerance	Projection	2.54 Double Base Female Header		
Angle ± 5°		2.54 雙排排針		
x. ±0.50	Drawn:	Joey.Lin	P/N:	PH2.54-XXP/2GF-11.4AR
x.x ±0.30	Checked:	C.L.Jang	File No:	
x.x.x ±0.10	Approved:	R.X.Lin	Unit: mm.	Sheet: 1/1.
x° ±1°			Size: A4.	