

2	1
Rev	Description
	Date
	2021.12.08

Technical Data

Material:

Contact Material: Brass

Insulator Material: PBT+30%G.F UL94V-0

Electrical:

Current rating: 3Amps/contact max.

Contact resistance: $\leq 20\text{m}\Omega/\text{contact}$

Insulation resistance: $\geq 1000\text{M}\Omega$ at $V=100\text{V}$


Withstanding Voltage: 550V AC/minute

Mechanical:

Operating temperatures: Gold plated: flash
:-55°C to +105°C

Tin plated: -40°C to +105°C

Soldering temperature: +260°C, 10s max.

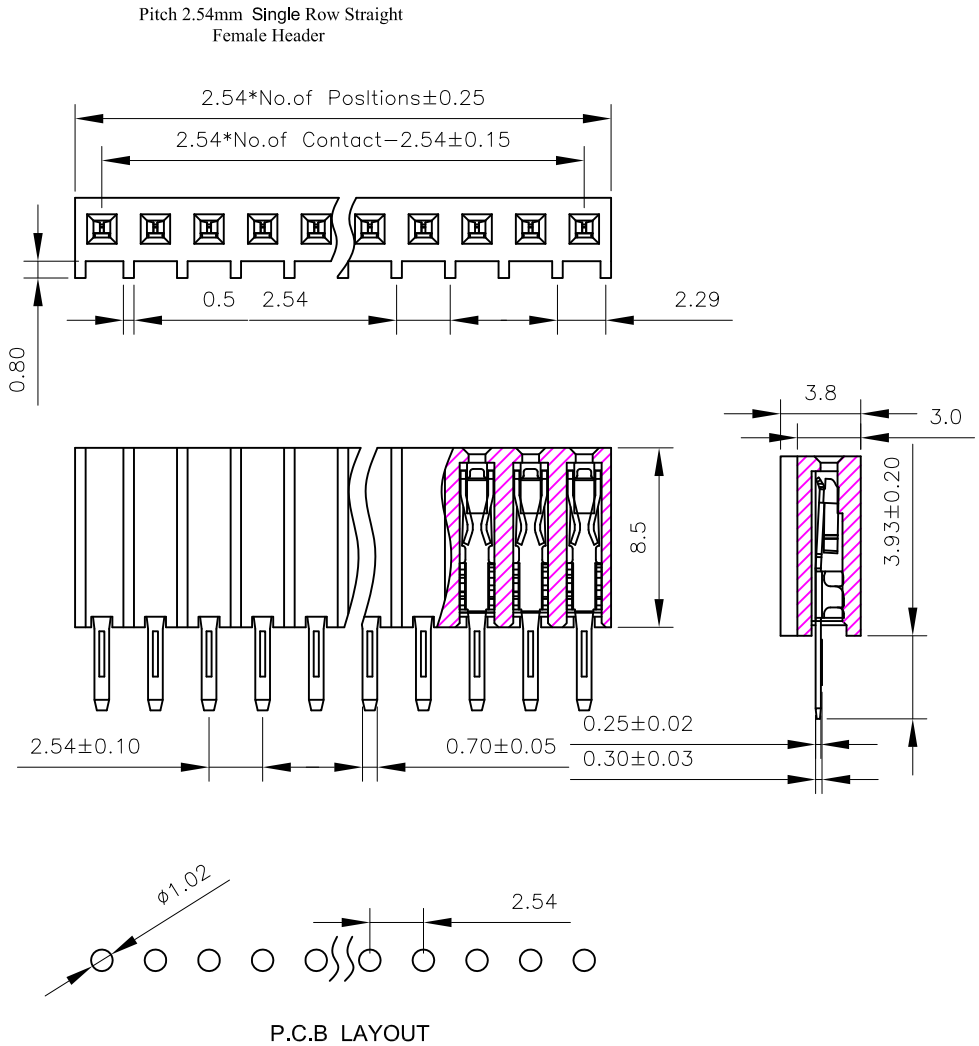

RONMEE		榮國工業股份有限公司	
		Ronmee Industrial Corporation	
Tolerance	Projection		Female Header
Angle $\pm 5^\circ$	Date:	2011.10.27	
>10 ± 0.50	Drawn:	Joey.Lin	P/N: FH2.54-1XXXX-GF
< 5 ± 0.30	Checked:	C.L.Jang	File No:
< 3 ± 0.10	Approved:	R.X.Lin	Unit: mm
			Scale: 1/1