


Rev	Description	Date
		2021.12.08

Technical Data

Material:
Contact Material: Brass
Insulator Material: PBT+30%G.F UL94V-0

Electrical:
Current rating: 3Amps/contact max.
Contact resistance: $\leq 20m\Omega$ /contact
Insulation resistance: $\geq 1000M\Omega$ at V=100V
Withstanding Voltage: 550V AC/minute

Mechanical:
Operating temperatures: Gold plated: flash
:-55°C to +105°C
Tin plated: -40°C to +105°C
Soldering temperature: +260°C, 10s max.

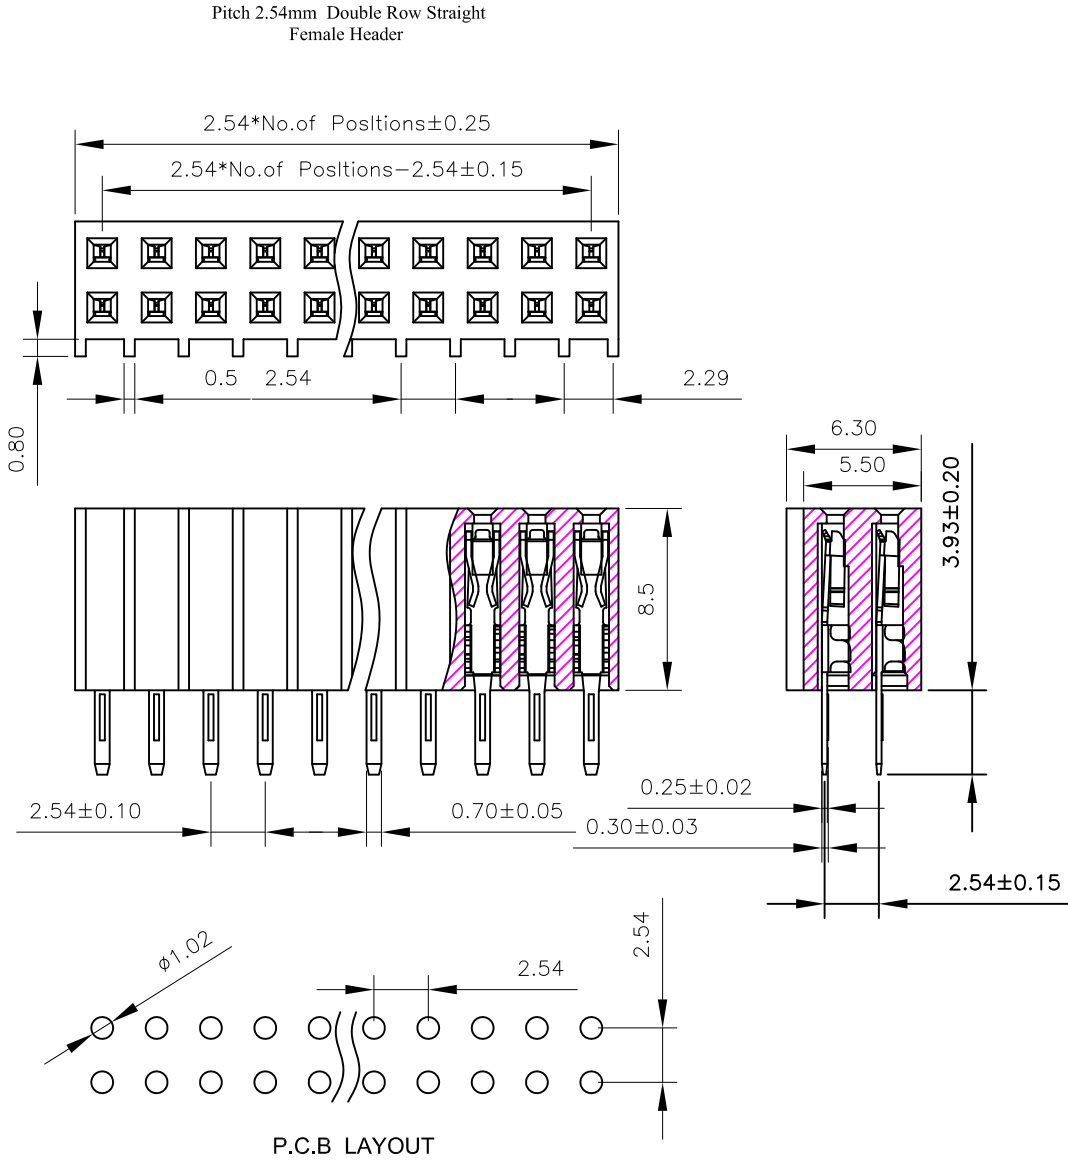

RONMEE		 榮國工業股份有限公司 Ronmee Industrial Corporation		
				Female Header
Tolerance	Projection		P/N: FH2.54-2XXXS-GF	
Angle $\pm 5^\circ$	Date:	2011.10.27		
>10 ± 0.50 < 5 ± 0.30 < 3 ± 0.10	Drawn:	Joey.Lin	File No:	
	Checked:	C.L.Jang		
	Approved:	R.X.Lin	Unit: mm	Scale: 1/1